



REVISIONS

| LETTER | DESCRIPTION | DWG BY | DATE |
|--------|-----------------------------|--------|---------|
| A | CORRECTED DRAWING AND NOTES | SMS | 3-13-17 |
| B | UPDATED LABEL | JOW3 | 8-4-17 |

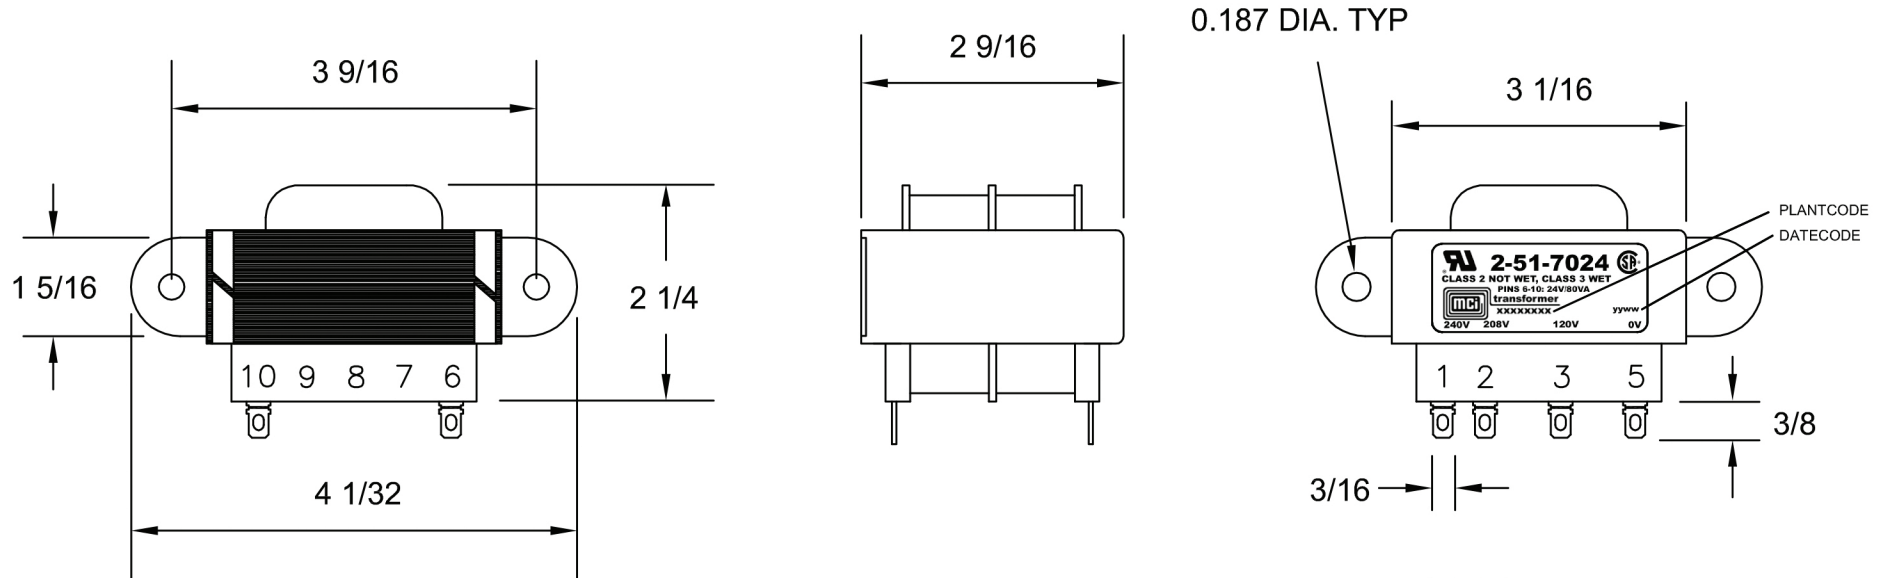

80 VA
50/60 HZ

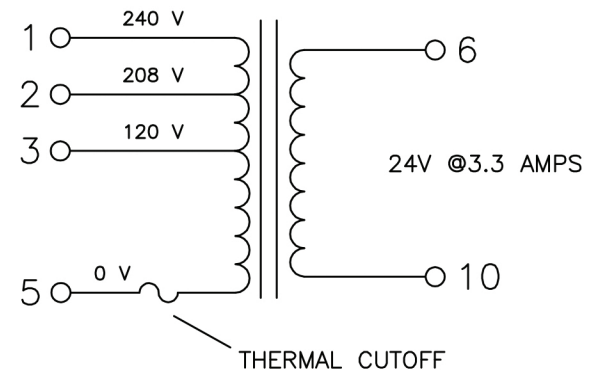

NOTES:

- 1) UL INSULATION SYSTEM E86543-CLASS F 155°C.
- 2) UL CLASS 2 RECOGNIZED COMPONENT CERTIFIED TO UL 5085-1, UL 5085-3: FILE # E120827
- 3) CSA CERTIFIED COMPONENT TO STANDARD C22.2 NO. 66-1988: FILE # LR08064
- 4) NON-INHERENTLY LIMITED.
- 5) 2500 VRMS HIPOT BETWEEN PRIMARY AND (SECONDARY + CORE).
500 VOLTS BETWEEN SECONDARY AND CORE.
- 6) WEIGHT: 2.75 LBS.
- 7) RoHS AND REACH COMPLIANT
- 8) ALL DIMENSIONS ARE IN INCHES.
- 9) 3.5 AMP FUSE MUST BE USED ON SECONDARY FOR CLASS 2 USE.

| | | | | | |
|------------|-----------|-------|---------|----------------|---|
| MCI | | | | | NORTH BABYLON N.Y. |
| CUSTOMER | | | | | MCI |
| TITLE | | | | | CLASS 2 QUICK CONNECT POWER TRANSFORMER |
| DRAWN BY | APPRVD BY | SCALE | DATE | DRAWING NUMBER | |
| SMS | JOW | NONE | 9-14-95 | 2-51-7024 | |