

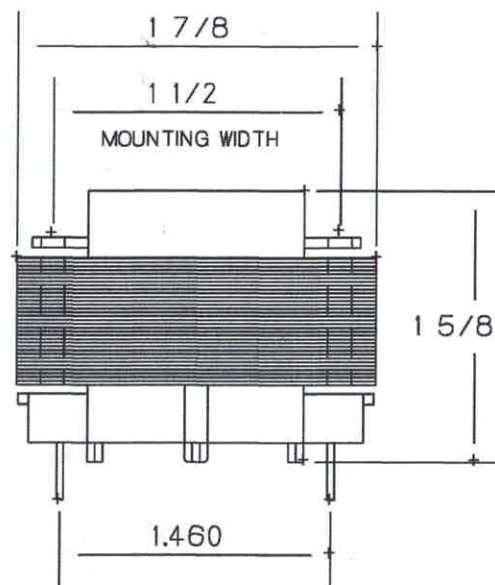


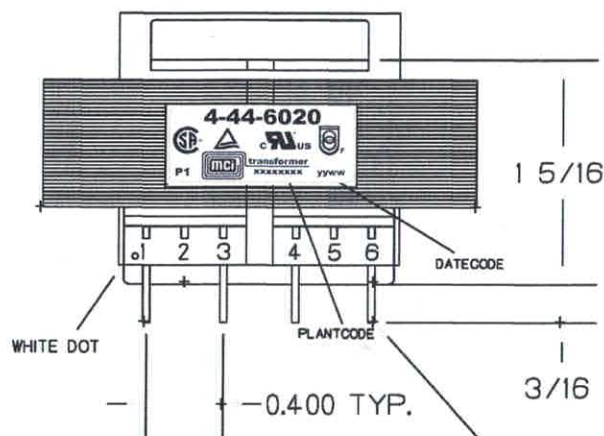

REVISIONS			
LETTER	DESCRIPTION	DWG BY	DATE
A	ADDED NOTES	SMS	8-20-14
B	REDRAWN AND UPDATED NOTES	SMS	1-20-17
C	PIN IDENTIFICATION	JOW3	10-20-25

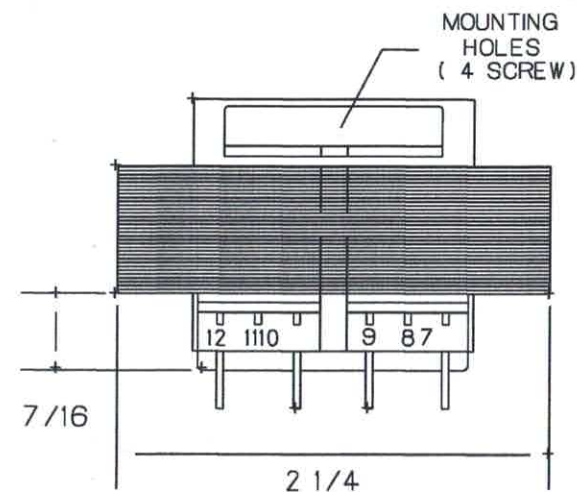


SQUARE PINS
0.036" SQ.

NOTES:

- 1) UL INSULATION SYSTEM E86543-CLASS F 155°C.
- 2) UL RECOGNIZED COMPONENT: FILE #E86403
- 3) ISOLATION TRANSFORMER CONSTRUCTION UL 60601-1 AND CSA C22.2 NO. 601.1-M90: FILE #178395
- 4) TUV CERTIFIED: EN61558-1 AND EN61558-2-6, "IPOO: FAIL-SAFE SAFETY ISOLATION TRANSFORMER"
- 5) CSA CERTIFIED: FILE #LR80864
- 6) 4000 VRMS HIPOT BETWEEN PRIMARY AND (SECONDARY + CORE).
500 VOLTS BETWEEN SECONDARY AND CORE.
- 7) WEIGHT: 0.90 LBS.
- 8) RoHS AND REACH COMPLIANT
- 9) ALL DIMENSIONS ARE IN INCHES.

20 VA
50/60 HZ

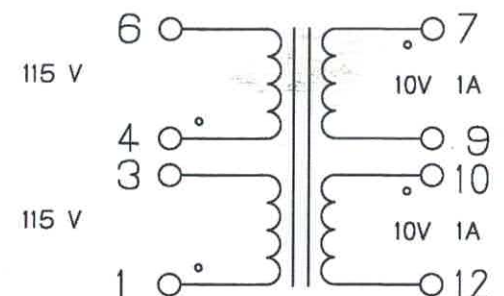

◦ INDICATE LIKE POLARITY

MCI				NORTH BABYLON N.Y.	
CUSTOMER		MCI			
TITLE					
INTERNATIONAL STYLE PC TRANSFORMER					
DRAWN BY	APPROV BY	SCALE	DATE	DRAWING NUMBER	
SMS	JOW	NONE	6-6-12	4-44-6020	